


Stäubli Quick Disconnect

Coupler Specification

Document No:
3-02-101-1

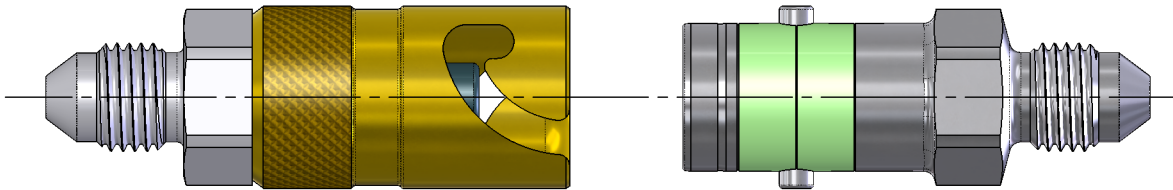

FEATURES:

- EASY TO OPERATE QUICK DISCONNECT COUPLER.
 - SAFETY LOCKING SYSTEM WITH VISUAL CONTROL.
 - JIC THREAD CONFORMS TO ISO 8434-2.
 - REDUCED WEIGHT AND VOLUME.
 - ALUMINIUM & STAINLESS STEEL OPTION.
 - CLEAN BREAK/FLUSH FACED DOUBLE SHUT OFF.
 - EPDM OR VITON SEALS.
-
- ACTUAL PRODUCT DESIGN MAY DIFFER FROM ILLUSTRATION
 - CONTACT FHS FOR FURTHER DETAILS / ADDITIONAL SIZES

FHS
MOTOR RACING

656 Ajax Avenue, Slough, Berkshire, SL1 4BH

Tel: +44 (0)1753 513080 Fax: +44 (0)1753 513099

www.fhsracing.co.uk e-mail: info@fhsracing.co.uk

This Data is confidential and is supplied on the express condition that it shall not be lent, copied or disclosed to any other person or used for any other purpose without the written consent of FHS Motor Racing Ltd.

© FHS Motor Racing Ltd 2010, Design rights under Copyright, Designs & Patents Act 1988 reserved.